

DM-7001

Double Coated Polyester Film

CONTENTS

Face	0.5 mil polyester
Adhesive	Medical grade, pressure-sensitive acrylic
Backing	Poly coated two-side/silicone coated two-side, 75 lb basis weight

FACE PROPERTIES

Test method

Thickness	0.5 mil	
Tensile Strength	3200 psi	ASTM D-882
Elongation	100%	ASTM D-882


Typical substrate values of uncoated materials.

ADHESIVE PROPERTIES

Test method

Peel Adhesion	>60 oz/in	PSTC-3
Polyken Probe Tack	300 g/in ²	ASTM D-2979
Loop Tack	1650 g/in ²	PSTC-16
Thickness	1.4 mil	Side: exposed liner
Biocompatibility	Cytotoxicity Primary Dermal Buehler	Pass Pass Pass

Product safety sheets are contained on file.

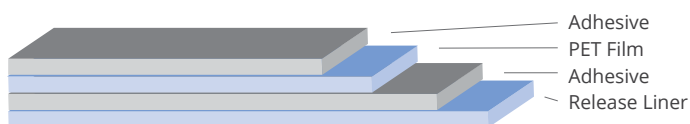

PRODUCT DESCRIPTION

DM-7001 is a clear polyester film. It is coated on both sides with a medical grade acrylic adhesive and supplied on a paper liner.

SPLICES

Splices on tape and liner are functional in that they are intended for continuous process conditions.

STANDARD LABELING

Materials will have core labeling stating the part number, roll number, lot number, width, and linear feet per roll. *Note: Any additional labeling requirements should be noted at time of order entry.*

TRACEABILITY

Material traceability must comply with current Good Manufacturing Practices. Each shipment of material will contain a lot number, which is traceable through production records. Certificate of Conformance will accompany each shipment.

STORAGE CONDITIONS

Product should be stored in original protective packaging at temperatures between 50-80°F.

ROLL DIMENSIONS Smaller roll length by request.

Length: 2000 linear feet max.

Width: 59 inch max.

Core: 3 inch inside diameter